


A felling head for forwarders, 5-8 ton excavators and truck loader cranes

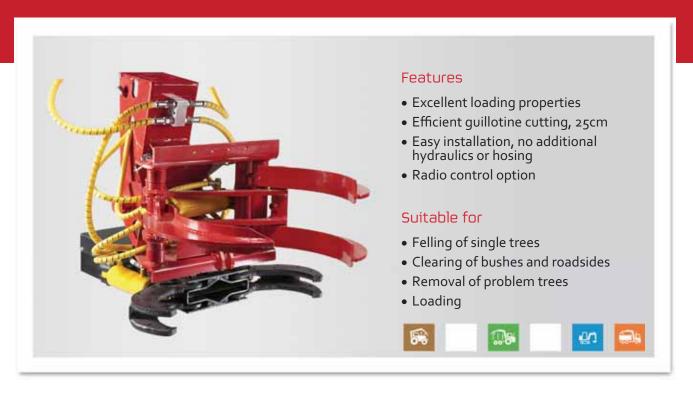

Effortless felling and loading

Naarva K25 is easy to install for example in the place of forwarders own loading grapple and to be used for felling, collecting, cutting and loading of trees, bushes and branches. K25 is also suitable for truck loader cranes for:

- Removing problem trees in urban areas and residential plots
- Removing hedges, old poles, and posts
- Shortening branches
- Cutting and lifting of trees fallen on power lines, roads, and buildings







TECHNICAL SPECIFICATIONS

Production code	K25
Weight without a rotator	300 kg
Height in felling position	90 cm
Grapple opening	90 cm
Cutting diameter*,	Max. cutting: Ø 25 cm
force and time**	95 kN, 1,8 s
Required hydraulic pressure	170-200 bar
Required oil flow	40-90 l/min
Warranty	12 months or 1000 hours
Control system	Cable control with 3 buttons or radio control
Voltage	12V or 24V

^{*}The max. cutting diameter is approx. 30% lower for hard wood (such as oak and beech). **With 90 l/min oil flow

DEALER MANUFACTURER



Pentin Paja Oy

Pamilonkatu 30

80130 Joensuu

Finland

All provided values are approximations. The manufacturer reserves the right to make changes in the products. 07/2016